

ARCHITECT & DESIGNER NEWSLETTER - SPRING

OUR PRODUCTS

Welcome to our spring Newsletter in 2021, specifically created for the design & architect community. Opus provides collaboration, architect & designer kits and guidance as you request.

Opus flooring products are accessible to you in innovative chip size flooring samples in our **unique** Architect and Designer Kits (see page 6-8) that are organized with colours and textures which duplicate in several platforms (**Good, Better, Best**). Products are available through our network of over 250 dealers across Canada. Opus also provides **customizable** flooring solutions.

Opus Floors is well on its way to achieving its goal of providing exceptionally constructed, eco minded, healthy flooring products with a low carbon footprint, and now with the Green Flow Cork flooring collection, Even a **negative carbon footprint!**



We welcome you to join us as we continue on our journey!

President
Vernon Verklej



CLASSICAL SERIES
-Engineered Hardwood
¾" thick, 7 ½" wide, 6'3" long, 10 ply
Available in **plant** based **natural oil** & Germany UV lacquer finishes


GREEN FLOW SERIES
-Natural Cork Flooring
7mm thick,
7-31/64" wide, 48-15/64" long
Negative carbon footprint

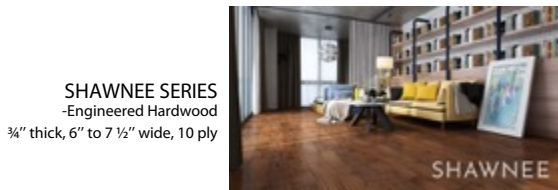

SHAWNEE SERIES
-Engineered Hardwood
¾" thick, 6" to 7 ½" wide, 10 ply



MAESTRO SERIES
-Engineered Vinyl Flooring (WPC Flooring)
1.5mm Vinyl + 4mm WPC + 1.5mm premium cork backing
Up to 5ft long



CREEK SERIES
-Engineered Hardwood
½" thick, 7 ½" wide, 6 ply



MAGIC SERIES
-Engineered Vinyl Flooring (SPC Flooring)
4mm SPC with 1mm Eco IXPE Backing
Up to 5ft long



EXPOSITION SERIES
-Water resistant Laminate Flooring and regular Laminate Flooring
Up to 7'3" long



EPOS SERIES
-Luxury Vinyl Plank (LVT Dryback Flooring)

NEW PRODUCTS

LONGER
7
Foot Plus!

WIDER
9"
Wide



Series	Expo MAX
Size	9 3/8" x 7'3" (12 x239 x2200mm)
Texture	Registered Embossed
Surface	Scratch Resistant Wearlayer
Installation	5G Click System
Environment	CARB II Compliant and Phthalate Free



Learn more about [Exposition MAX](#)

GREEN FLOW



Green Flow structure:

1. High Performance Advanced NANO HRF Finish
2. Genuine Cork Veneer/High Quality Digital Print 1000DPI
3. Agglomerated Cork 1mm
4. 100% Solid Cork Core
5. Angle/Angle click system
6. Silent Cork Underlay



Green Flow Cork Flooring is nature's gift to our well-being. Cork is **anti-microbial, anti-allergenic** and **does not support the growth of mold or mildew.** Nature has engineered cork to support a healthy environment without the use of chemical additives such as Microban, which can have a negative impact on air quality. **Green Flow has an Indoor Air Quality Rating of A+.** In applications where there are concerns of how flooring might impact allergies, asthma or other pulmonary concerns, **Green Flow is a healthy choice!**




Solid Cork Core

made with a revolutionary new technology by creating an engineered compressed cork core, which is completely stable and allows **Green Flow** to be installed in any residential or commercial project.

100% NATURAL,
CORK FLOORING,
PVC FREE

Learn more about [Green Flow Series](#)

ENVIRONMENT
SUSTAINABILITY
GREEN FLOW

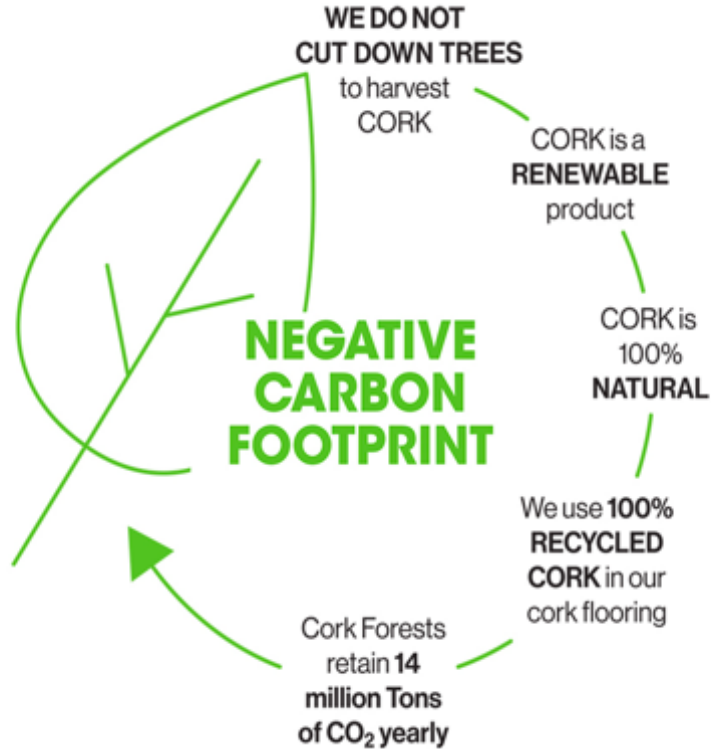

The Portuguese Cork Oak **Tree** – QUERCUS SUBER L – forests retain approx. **14 million tons** of CO₂ yearly. **Not** a single tree is cut or damaged during the harvesting.



GREEN FLOW

can assist in
attaining as many as

6 LEED® credits

USGBC and CGBC LEED® V4.1

Cork flooring can be an important contributor to a healthy lifestyle and using our planets resources wisely.

Opus Floors Canada; **Green Flow** Collection and cork underlay can also be an important contributor to buildings seeking USGBC and CGBC LEED® Certification.

MR CREDIT: Building Product Disclosure and Optimization- Environmental Product Declarations BD+C 1-2 points

Intent: To encourage the use of products & materials for which life-cycle information is available & that have environmentally, economically, & socially preferable life-cycle impacts.

To reward project teams for selecting products from manufacturers who have verified improved environmental life-cycle impacts.

Green Flow Cork flooring is comprised of 3 layers of cork, each of different density & each utilizing post-industrial waste created during the manufacture of bottle corks.

EQ CREDIT: Low-Emitting Materials BD+C 1-3 points

Intent: To reduce concentrations of chemical contaminants that can damage air quality, human health, productivity, and the environment.

Adhesives and finishes recommended for use with Green Flow are low VOC and are below California's SCAQMD Rule 1168 for Adhesives and Rule 1113 for finishes.

Green Flow has an A+ rating as tested by the Eco-Institute for Construction and Furnishings products.

EQ CREDIT: Acoustic Performance BD+C 1-2 points

Intent: To provide workspaces and classrooms that promote occupants' well-being, productivity, and communications through effective acoustic design.

Cork bark used in the manufacture of Green Flow is comprised of millions of cellular pockets for cubic inch. Cork has a natural ability to absorb sound and reduce sound transference between building levels.

IN CREDIT: Innovation BD+C

Intent: To encourage projects to achieve exceptional or innovative performance.

Corks' many unique properties can contribute to unique applications and uses. Opus Floors Canada encourages conversations and exploration of how we can help provide innovative solutions to unique challenges.

GREEN FLOW & SILENT CORK UNDERLAY



Anti
Bacterial

The antimicrobial properties in cork flooring allows it to have water-resistant attributes and helps promote a healthy and clean environment as it prevents organisms to grow and colonize.



Anti
Allergic

For people with allergies, cork flooring can be a great replacement for carpeting. It is antimicrobial and is less likely to be affected by mold and mildew. Cork flooring also does not absorb dust or pollen, making it easier to rid your home of these potential allergens.



SILENT CORK UNDERLAY

100% natural cork,
Negative Carbon Footprint!

Making the lives of our Customers, Dealers, Associates and Community better.

Opus Floors Canada Corp.
www.opusfloors.ca

NATURAL ACOUSTIC SILENT CORK UNDERLAY

WALKING COMFORT

RESILIENCE & COMPRESSIBILITY

RESISTANCE & FLEXIBILITY



THERMAL INSULATOR

ACOUSTICAL INSULATOR

HYPOALLERGENIC



PACKING: 50sheets/carton for 6mm

PACKING: 100sheets/carton for 3mm

QUANTITY: 300sqft/ctn for 6mm

QUANTITY: 600sqft/ctn for 3mm

THICKNESS: 1/8"(3mm)& 1/4"(6mm)

WIDTH: 24" (610mm)

LENGTH 36" (914mm)

GREEN FLOW

CORK ARCHITECT & DESIGNER KITS



Green Flow can assist in
attaining as many as

6 LEED® credits


- Please contact your sales representative for Interior Design Library samples.
- Our Commitment to The Environment: We are working with you to keep samples out of landfill & to reuse them.
- Please contact us to return samples when a project is finished.

HARDWOOD ARCHITECT & DESIGNER KITS




18/4 x 190 x 1900mm (approx. 3/4" x W7 1/2" x 6'3") **Mozart Oak**

Classical Series

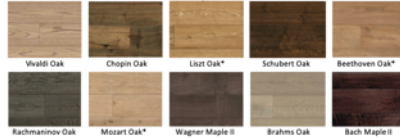


18/4 x 150 x Random Length (approx. 3/4" x W6" x Random Length) **Mayfield Walnut II**

Shawnee Series

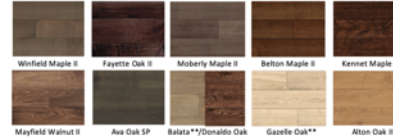

12/3 x 190 x Random Length (approx. 3/4" x W7 1/2" x Random Length) **Angel Oak**

Creek Series



Good	Better	Best
Creek Series	Shawnee Series	Classical Series
1/2"x 6 1/2"-7 1/2" Random Length	3/4" x 6"-7 1/2" Random Length	3/4" x 7 1/2" x 6'2"-6'3" Fixed Length Proportion: Oak 85%/Maple 33%
6 ply	9 ply	9 ply
Eucalyptus & Poplar Core	Eucalyptus & Poplar Core	Eucalyptus & Poplar Core
UV Oil/UV Urethane	UV Oil/UV Urethane	Natural Oil*/UV Urethane
2-3mm wearlayer	4mm wearlayer	4mm wearlayer
Nail/Float/Glue down	Nail/Float/Glue down	Nail/Float/Glue down
Radiant Heat Approved	Radiant Heat Approved	Radiant Heat Approved
Meets CARB2 Standard	Meets CARB2 Standard	Meets CARB2 Standard
Designed & Manufactured Eco Friendly	Designed & Manufactured Eco Friendly	Designed & Manufactured Eco Friendly

SUPERIOR WEARLAYER and MULTIPLY CONSTRUCTION for LONGER LIFE & GREATER STABILITY

Opus **Classical Series** engineered hardwood floors are finished with either UV Urethane or Osmo Polyx®-Oil. This **NATURAL** product uses the newest most advanced **NATURAL** processes. The finishes are derived from natural plant, vegetable oils and waxes. These ***NATURAL Oils** are microporous and molecularly bond with the wood, meaning no cracking, flaking or peeling. Open pores allow for absorption of VOCs for healthier air. When adequate amounts of Osmo Polyx®-Oil are present, the floor will be resistant to water, dirt, beer, wine, cola and saliva. Using regular cleaning and maintenance with oil soap (Osmo Wash and Care) will postpone the need for eventual application of maintenance oil to rejuvenate and maintain floor protection.

Opus **Shawnee Series** and **Creek Series** engineered hardwood floors are finished with either UV Urethane or WOCA UV Oil. ****UV Oil** finish has similar properties to Natural oil, however it is sealed by UV light which requires less maintenance than Natural oil finishes. Eventually, UV Oil will require an application of maintenance oil similar to Natural Oil products. Both Natural Oil and UV Oil finishes require the correct maintenance to ensure optimum levels of protection. UV Oil (WOCA) and Natural Oil (Osmo) finishes must be maintained with recommended maintenance products.


The advantages of UV Oil/Natural Oil finishes vs. UV Urethane finishes are that they can be spot-repaired and/or restored/renewed, and in most cases with no sanding required at lower cost and disruption. UV Urethane finishes are able to resist absorption of stains and spills longer than either UV or Natural Oil finishes

Please download at www.opusfloors.ca




Products listed can and do change, to confirm current products, to view larger images and to get more information, please visit www.opusfloors.ca

VINYL/LAMINATE ARCHITECT & DESIGNER KITS

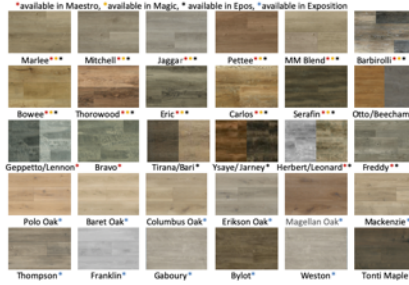

Series	Maestro/Maestro Plus	Magic/Magic Plus	Epos	Expo Reg/Expo WR/Expo MAX
Construction	1.5mm Vinyl/4mm WPC with 1.5mm Premium Cork Backing	4mm SPC with 1mm Eco IXPE Backing	LVT Virgin PVC	12mm Laminate HDF core
Size	7mm thick x 6-12" wide 2'-5" long	5mm thick x 7"-9" wide 4'-5" long	2.5mm thick x 6-9½" wide 4' long	12mm thick x 7¼"-9¾" wide 4'-7'2½" long
Wearlayer	Commercial 12mil Wearlayer Click	Commercial 12mil Wearlayer Click	Commercial 20mil Wearlayer Glue Down	Scratch Resistance Wearlayer Droplock/SG click(Expo MAX)
Installation	*Hides Minor Subfloor Flaws	*Hides Minor Subfloor Flaws	*See installation instruction	*See installation instruction
Stability	Resists water without damage to flooring	Resists water without damage to flooring	Resists water without damage to flooring	Resists water without damage to flooring (Expo WR & Expo MAX)
	No T mold until 40' Stable in lab to 65°C	No T mold until 50' Stable in lab to 80°C	N/A	No T mold until 42'/36'(Expo MAX) Stable to 36°C
Radiant Heat	OK with approved/properly functioning systems	OK with approved/properly functioning systems	OK with approved/properly functioning systems	OK with approved/properly functioning systems
Warmth Sound Comfort	Superior Warmth, Comfort & Sound Reduction(Air in WPC Core), Vinyl top & Cork Backing	Additional Comfort and Sound reduction with SPC core and Eco IXPE underlay	PVC for warmth and comfort	3mm IXPE underlay required for further comfort and sound reduction
Environment	Phthalate Free No Formaldehyde	Phthalate Free No Formaldehyde	Phthalate Free No Formaldehyde	Phthalate Free CARB 2 compliant (Expo WR & Expo MAX) E1 Rated(Expo Reg)
	Floor Score	Floor Score	Floor Score	Floor Score(Expo WR & Expo MAX)
Special Features	SUPERIOR WARMTH, COMFORT and SOUND REDUCTION	OK 3 seasons SUNROOMS/COTTAGES with 4th season unheated Builder Budget Valued	Heavy commercial rated Commercial Project Valued	Registered embossed Premium Laminate



Please download at www.opusfloors.ca



Products listed can and do change, to confirm current products, to view larger images and to get more information, please visit www.opusfloors.ca

DID YOU KNOW
Engineered Hardwood:
You can get same/similar
colour & pattern in
3 different pricings
& platforms.

Good	Better	Best
Creek	Shawnee	Classical

CREEK SERIES

ENGINEERED HARDWOOD:
1/2'' x 6 1/2''-7 1/2'' x RL

GOOD



SHAWNEE SERIES

ENGINEERED HARDWOOD:
3/4'' x 6''-7 1/2'' x RL

BETTER



CLASSICAL SERIES

ENGINEERED HARDWOOD:
3/4'' x 7 1/2'' x 6'2''-6'3'' x FL

BEST



Most important customer will be provided opportunity to select the **best suited product** for their needs.

Learn more about [Good Better Best in Engineered Hardwood Flooring](#)

DID YOU KNOW

Vinyl Flooring:


You can get same/similar colour & pattern in **3 different pricings & platforms.**

Good	Better	Best
Epos	Magic	Maestro

EPOS SERIES

LUXURY LVT
VINYL PLANK

GOOD

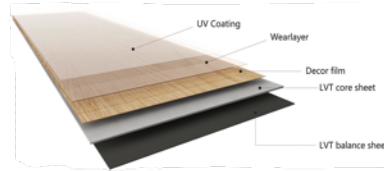

MAGIC SERIES

ENGINEERED SPC
VINYL FLOORING


BETTER



MAESTRO SERIES

ENGINEERED SPC
VINYL FLOORING

BEST



Most important customer will be provided opportunity to select the **best suited product** for their needs.

Learn more about [Good Better Best in Vinyl Flooring](#)

DID YOU KNOW

Laminate Flooring:

You can get same/similar colour & pattern in **3 different pricings & platforms.**

Good	Better	Best
Exposition	Exposition Water Resistant	Exposition MAX

EXPOSITION SERIES

LAMINATE FLOORING


GOOD



EXPO WR SERIES

WATER RESISTANT LAMINATE FLOORING

BETTER



EXPO MAX SERIES

MAX SIZE WATER RESISTANT LAMINATE FLOORING

BEST




Most important customer will be provided opportunity to select the **best suited product** for their needs.

Learn more about [Good Better Best in Exposition Laminate Flooring](#)

QUALITY CONTROL

We do more than
40 inspection items
for every container.

QUALITY CONTROL

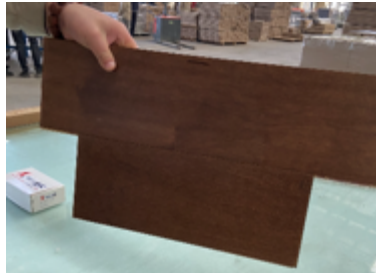

SUPERIOR ACOUSTIC PROPERTIES



This is a demonstration tool to test acoustic properties of different flooring types.
Please contact your sales representative for the acoustic hammer.



Listen to [acoustic properties of different flooring types](#)

Opus Floors Canada Corp.

ARCHITECT & DESIGNER NEWSLETTER

OPUS FLOORS



You are a valued member of our community, and we'd love to have you help us continually improve. If you have any queries or feedback, feel free to notify us so we can assist you further.

info@opusfloors.ca

Tel: 1 (800) 653 6177

Fax: 1 (866) 506-6448

www.opusfloors.ca